


Pick a side to start on, it does not matter which side is installed first.

1. Remove the seat.
2. Using an 8mm T-Handle or socket, remove the 4 bolts on the radiator shroud. (Keep these bolts, they will be reused) (FIG 1)
3. Remove radiator louver by pressing inward on the tabs while pulling outward on the louver.
4. Using an 8mm T-Handle or socket, remove the two radiator mounting bolts.
5. Line up the inside mount which is the smaller bracket labeled 12-4123-02, with the radiator mounting holes. Using the provided M6x16 flange bolts, mount the inside mount to the frame and radiator, tighten using an 8mm T-Handle or socket. Make sure the threaded holes are facing forward. (FIG 2)
6. Line up the outside mount (12-4123-03L for left or 12-4123-03R for right) to the holes on the radiator that the louver tabs were located. Take the provided M6x16 flat head bolts and mount the outside mount to the radiator, use a 4mm Allen wrench to tighten. Make sure the threaded holes are facing forward. (FIG 3)
7. Line up the front plate (12-4123-01L for left or 12-4123-01R for right) to the threaded mounting holes on the inside and outside mounts with the Enduro Engineering sticker upright and facing outward. Using 6 of the provided M5x12 socket head bolts, thread them through the front plate and into the 3 threaded holes on both the outside and inside mounts. Make sure to have all 6 started by hand before tightening. (FIG 4) Tighten using a 4mm allen wrench. (FIG 5)
8. Reinstall the radiator shroud using the same 4 bolts removed in step 2.
9. Repeat the process on the opposite side.
10. Reinstall the seat.
11. Have fun and enjoy your next ride.

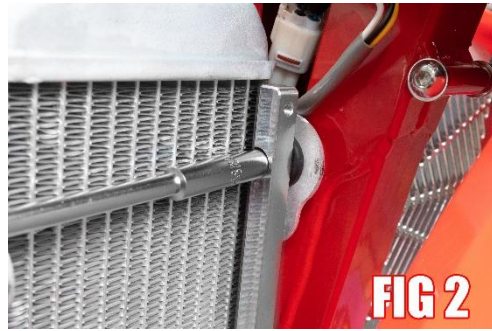

## WARNING AND DISCLAIMER

All parts manufactured, designed or sold by Enduro Engineering, Inc. (EEI) are to be installed by a licensed motorcycle dealer or a licensed motorcycle technician. Motorcycles can be dangerous. Serious injury, death and property damage can result from the use of motorcycles. This risk is increased by improper installation or misuse of after market parts. EEI's customers must exercise good judgement in the use, control, alteration, part selection and installation, and maintenance of their motorcycles. In the event of a possible defect in material or design, or any other defect in a part manufactured, designed or sold by EEI, the responsibility of EEI is limited either a refund of the purchase price or the replacement of the part if EEI determines the part to be defective, and subject to EEI's inspection of the part within thirty (30) days from the date of purchase. (Note: any attempted repairs or modifications made to EEI Products will void this limited warranty.) EEI, under no circumstances will be responsible for incidental and/or consequential damages, property damage, personal injury damage, or damage, injury, cost or expense of any kind or nature whatsoever. By purchasing as product or a product sold by EEI, you (1) acknowledge the above disclaimer and agree to its terms; (2) agree that any claim brought against EEI arising from and/or pertaining to or otherwise related to a part manufactured, designed or sold by EEI must be brought in the Michigan State Courts located in the County of Ingham or in the Federal District Court for the Western District of Michigan and the Michigan law shall apply on all issues; and (3) any claim against EEI must be brought within one (1) year of purchase of the product. EEI makes no other warranty, express or implied, including without limitation any warranties of merchantability and fitness for a particular purpose.

## BETA RADIATOR GUARD INSTALLATION INSTRUCTIONS PART NUMBER: 12-4123

Quality Off-Road Motorcycle Products



enduroeng.com/517.393.2421/info@enduroeng.com