

1. If you have an OEM Plastic skid plate installed. Remove the skid plate.
2. Install foam frame protector.
3. We recommend you install the Enduro Engineering Linkage Guard (31-4117) onto your new Enduro Engineering Skid Plate before mounting the Skid Plate onto the frame.
4. In some cases loosening the header pipe from the motor with a 10mm or socket helps to access the front mounting hole location of the skid plate.
5. Hold the Aluminum Skid Plate up to the frame lining up the front mounting hole and the rear mounting hole. (If you are using the Skid Plate Mounted linkage guard, bend the linkage guard down towards the ground to be able to tip the skid plate up in the rear to get the bend of the front of the plate over the front cross bar of the motorcycle frame between the frame and the header pipe.) (FIG 1)
6. Starting with the rear. Take the supplied 6x20 hex head bolt and start by hand in the rear mounting hole. (If you are using the linkage guard bend the linkage guard downward again to be able to press the skid plate against the frame to start the bolt.) (FIG 2)
7. Tighten the bolt using an 8mm T-Handle or socket. This will pull the front of the plate into position to line the front bolt up. (FIG 3)
8. Take the supplied 6x16 hex head bolt and start by hand in the front mounting hole. If you are able to get an 8mm T-Handle or socket to the head with a loose header pipe tightened the bolt. (FIG 4) You may find using a T-Handle T-30 Torx wrench is easier to access the bolt. (FIG 5) A box end 8mm may also be used. (FIG 6)
9. If you loosened the header pipe, be sure to re tighten using a 10mm T-Handle or Socket.
9. Have fun and enjoy your next ride.



FIG 1

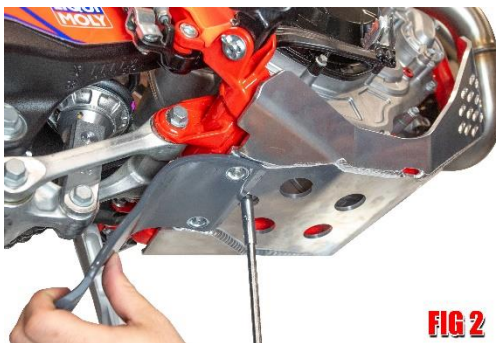


FIG 2



FIG 3



FIG 4



FIG 5



FIG 6

WARNING AND DISCLAIMER

All parts manufactured, designed or sold by Enduro Engineering, Inc. (EEI) are to be installed by a licensed motorcycle dealer or a licensed motorcycle technician. Motorcycles can be dangerous. Serious injury, death and property damage can result from the use of motorcycles. This risk is increased by improper installation or misuse of after market parts. EEI's customers must exercise good judgement in the use, control, alteration, part selection and installation, and maintenance of their motorcycles. In the event of a possible defect in material or design, or any other defect in a part manufactured, designed or sold by EEI, the responsibility of EEI is limited to either a refund of the purchase price or the replacement of the part if EEI determines the part to be defective, and subject to EEI's inspection of the part within thirty (30) days from the date of purchase. (Note: any attempted repairs or modifications made to EEI Products will void this limited warranty.) EEI, under no circumstances will be responsible for incidental and/or consequential damages, property damage, personal injury damage, or damage, injury, cost or expense of any kind or nature whatsoever. By purchasing as EEI product or a product sold by EEI, you (1) acknowledge the above disclaimer and agree to its terms; (2) agree that any claim brought against EEI arising from and/or pertaining to or otherwise related to a part manufactured, designed or sold by EEI must be brought in the Michigan State Courts located in the County of Ingham or in the Federal District Court for the Western District of Michigan and the Michigan law shall apply on all issues; and (3) any claim against EEI must be brought within one (1) year of purchase of the product. EEI makes no other warranty, express or implied, including without limitation any warranties of merchantability and fitness for a particular purpose.

PART # 24-4224, 24-4224X
Skid Plate Installation Instructions

Quality Off-Road Motorcycle Products

**Enduro
Engineering**

enduroeng.com/517.393.2421/info@enduroeng.com