

EE Installation Instructions

- 1** Remove the air box cover (fig. 1).
- 2** Using a 10mm socket remove the 8mm bolt for the OEM chain guide (fig. 2).
- 3** Using an 8mm socket remove the three 6mm bolts for the slave cylinder and OEM chain guide (fig. 3).
- 4** Connect the supplied 8mm clip nut to the knockdown bar as shown (fig. 4).
 - 4a** **NOTE:** Be sure the threads of the clip nut are on the same side as the "016" part #.
- 5** Using the supplied M8x55mm hex head bolt, fasten the provided spacer, chain slider and knockdown bar as shown (do not tighten at this time) (fig. 5).
 - 5a** **NOTE:** be sure the opposite side of the knockdown bar is positioned as shown (fig. 6).
- 6** Using the provided M6x40mm hex head bolts, mount the clutch guard over the slave cylinder and wire (fig. 7).
 - 6a** Make sure the wire is positioned within the clearance area inside the clutch guard.
 - 6b** Push the slave cylinder guard and slave cylinder up against the engine cases with your hand.
 - 6c** Align the 3 bolts in the slave cylinder guard and tighten the three bolts in a star pattern to ensure a square fit.
- 7** Refer back to step 5 and tighten the 8mm bolt at this time.
 - 7a** **NOTE:** Make sure the chain slider is rotated up against the air box (fig. 5). It is normal for the slider to be horizontal or even slightly angled down (fig. 5.1).
- 8** Have fun and ride safe!

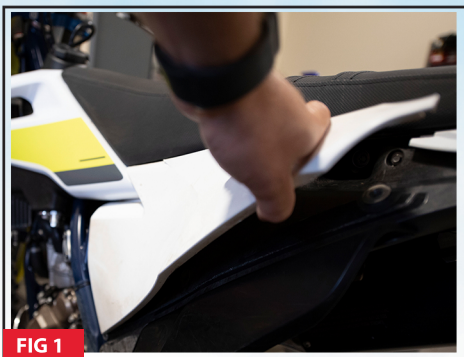


FIG 1



FIG 2



FIG 3

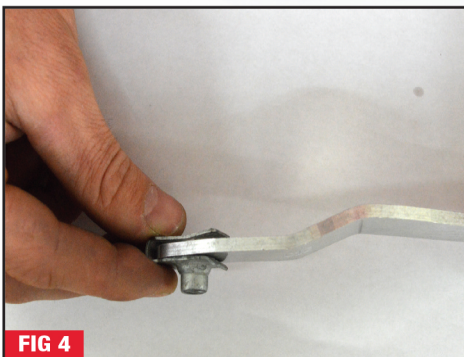


FIG 4



FIG 5



FIG 5.1

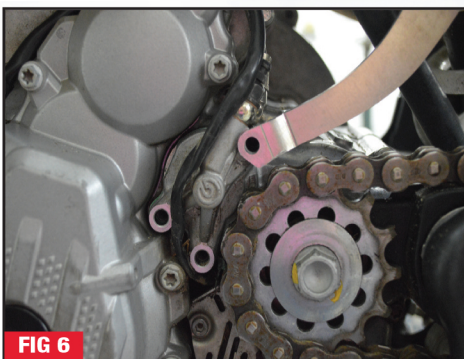


FIG 6



FIG 7

WARNING AND DISCLAIMER

All parts manufactured, designed or sold by Enduro Engineering, Inc. (EEI) are to be installed by a licensed motorcycle dealer or a licensed motorcycle technician. Motorcycles can be dangerous. Serious injury, death and property damage can result from the use of motorcycles. This risk is increased by improper installation or misuse of after market parts. EEI's customers must exercise good judgment in the use, control, alteration, part selection and installation, and maintenance of their motorcycles. In the event of a possible defect in material or design, or any other defect in a part manufactured, designed or sold by EEI, the responsibility of EEI is limited to either a refund of the purchase price or the replacement of the part if EEI determines the part to be defective, and subject to EEI's inspection of the part within thirty (30) days from the date of purchase. (Note: any attempted repairs or modifications made to EEI products will void this limited warranty). EEI, under no circumstances will be responsible for incidental and/or consequential damages, property damage, personal injury damage, or damage, injury, cost or expense of any kind or nature whatsoever. By purchasing an EEI product or a product sold by EEI, you (1) acknowledge the above disclaimer and agree to its terms; (2) agree that any claim brought against EEI arising from and/or pertaining to or otherwise related to a part manufactured, designed or sold by EEI must be brought in the Michigan State Courts located in the County of Ingham or in the Federal District Court for the Western District of Michigan and that Michigan law shall apply on all issues; and (3) any claim against EEI must be brought within one (1) year of purchase of the product. EEI makes no other warranty, express or implied, including without limitation any warranties of merchantability and fitness for a particular purpose.
R.JRF.Sec.randt.warninganddisclaimer. 5 2 08



QUALITY OFF-ROAD MOTORCYCLE PRODUCTS

INSTRUCTIONS

Installation Instructions

Part# 13-2021